


FORM PTO-1390 OFFICE (REV. 10-95)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK		ATTORNEY'S DOCKET NUMBER CM2187FM	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				U.S. APPLICATION NO. (if known, see 37 CFR 1.5) 10/070571	
INTERNATIONAL APPLICATION NO. PCT/US00/15534		INTERNATIONAL FILING DATE 05 June 2000		PRIORITY DATE CLAIMED 09 September 1999	
TITLE OF INVENTION A Handle For A Toothbrush					
APPLICANT(S) FOR DO/EO/US VOLPENHEIM, Daniel William et al.					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information.					
1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.					
2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.					
3. <input type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. 371(f) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(I).					
4. <input checked="" type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.					
5. <input checked="" type="checkbox"/> A copy of the International Application was filed (35 U.S.C. 371(c)(2))					
a. <input type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau).					
b. <input type="checkbox"/> has been transmitted by the International Bureau.					
c. <input checked="" type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US).					
6. <input type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)).					
7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))					
a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau).					
b. <input type="checkbox"/> have been transmitted by the International Bureau.					
c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.					
d. <input checked="" type="checkbox"/> have not been made and will not be made.					
8. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).					
9. <input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).					
10. <input type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).					
Items 11. to 16. below concern document(s) or information included:					
11. <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.					
12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.					
13. <input checked="" type="checkbox"/> A FIRST preliminary amendment.					
<input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment.					
14. <input type="checkbox"/> A substitute specification.					
15. <input checked="" type="checkbox"/> A change of power of attorney and/or address letter.					
16. <input type="checkbox"/> Other items or information:					
"Express Mail" mailing label number <u>ET342750043US</u>					
Date of Deposit <u>March 8, 2002</u>					
I hereby certify that this paper/fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to The Assistant Commissioner of Patents, Washington, D.C. 20231.					
Lori Deethenage Administrator Mailing Applications  Signature					

Case CM2187FM

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In the U.S. National Phase Entry
Under 35 USC 371 from
International Application of
VOLPENHEIM, Daniel William et al.
Intl. Application No. PCT/US00/15534
Filed in the RO/US on 05 June 2000
Entitled: A Handle For A Toothbrush

PRELIMINARY AMENDMENT UNDER 37 CFR §1.112

Assistance Commissioner for Patents
Box PCT
Washington, D. C. 20231

Dear Sir:

Prior to Examination and computation of the fees for entering the captioned International Application into the U. S. National Phase, please preliminarily amend the above-identified application as follows and consider the following Remarks.

AMENDMENTS

IN THE CLAIMS

2. A handle according to Claim 1 wherein the ratio of the maximum length of major axis of the first grip portion to the maximum length of the major axis of the second grip portion is from 1.2:1 to 1.8:1.
3. A handle according to Claim 1 wherein the ratio of the major axis of the first grip portion to the minor axis of the first grip portion is from 1.4:1 to 1.1:1.
4. A handle according to Claim 3 wherein the ratio of the major axis of the first grip portion to the minor axis of the first grip portion is from 1.3:1 to 1.1:1.
5. A handle according to Claim 1 wherein the first grip portion has a longitudinal length of from 50 to 100 mm.
6. A handle according to Claim 1 wherein the first grip portion is coated with elastomer.

7. A handle according to Claim 1 wherein the ratio of the major axis of the second grip portion to the minor axis of the second grip portion is from 1.3:1 to 1.1:1.
8. A handle according to Claim 1 wherein the major axis of the second grip portion has a maximum length of from 8 to 14 mm.
9. A handle according to Claim 1 wherein the minor axis of the second grip portion extends between top and bottom surfaces thereof and at least one of the top and bottom surfaces has gripping ridges (7) thereon.
10. A handle according to Claim 1 further comprising a third grip portion (4) distal the second grip portion (3), the third grip portion being both wider and deeper than the second grip portion.
12. A handle according to Claim 1 which has a primary grooming head (6) integrally or releasably attached to the distal end thereof, and wherein the grooming head has bristles extending therefrom in a direction generally parallel to the major axis of the first grip portion.
15. A personal grooming implement according to Claim 13 or wherein the removable first grip portion is adapted to provide a cap which can fit over the primary grooming head.

REMARKS

Claims 1, 11, 13 and 14 remain in this application. Claims 2-10, 12 and 15 have been amended by eliminating multiple dependencies and deleting preferably clauses. Attached hereto is a marked-up version of the changes made to the claims by the current amendment. The attached page is captioned "Version With Markings to Show Changes Made."

The support for these amendments is found in the claims as originally filed. These amendments are being entered to bring the claims into conformance with, *inter alia*, 37 CFR §1.75, no new matter is added.

Respectfully submitted for Applicants,

By _____

James C. Vago
Attorney for Applicant
Registration No. 40,855

Cincinnati, Ohio
08 March 2002
(513)627-7025/FAX (513)627-6333

"VERSION WITH MARKINGS TO SHOW CHANGES MADE"

Claims

1. An elongated handle (1), for a personal care implement such as a toothbrush, having distal and proximal ends, the distal end being connected to, or adapted to connect to, a grooming head (6); the handle comprising:
 - a) a first grip portion (2), adjacent the proximal end of the handle, for holding in the user's hand, the first grip portion having an ovoid cross-section which has a major axis and a minor axis; and
 - b) a second grip portion (3), for manipulation by the user's fingers, extending from the first grip portion in the direction of the distal end of the handle, and having, at least in a region adjacent the first grip portion, an elliptical cross-section which has a major axis and a minor axis;
 characterised in that the major axis of the second grip portion is perpendicular to the major axis of the first grip portion.
2. A handle according to Claim 1 wherein the ratio of the maximum length of major axis of the first grip portion to the maximum length of the major axis of the second grip portion is from 1.2:1 to 1.8:1 [preferably from 1.3:1 to 1.6:1].
3. A handle according to Claim 1 ^{CLAIM 1} [or Claim 2] wherein the ratio of the major axis of the first grip portion to the minor axis of the first grip portion is from 1.4:1 to 1.1:1.
4. A handle according to Claim 3 wherein the ratio of the major axis of the first grip portion to the minor axis of the first grip portion is from 1.3:1 to 1.1:1 [preferably from 1.2:1 to 1.1:1].
5. A handle according to ^{CLAIM 1} [any preceding claim] wherein the first grip portion has a longitudinal length of from 50 to 100 mm [preferably from 60 to 90 mm].
6. A handle according to ^{CLAIM 1} [any preceding claim] wherein the first grip portion is coated with elastomer.
7. A handle according to ^{CLAIM 1} [any preceding claim] wherein the ratio of the major axis of the second grip portion to the minor axis of the second grip portion is from 1.3:1 to 1.1:1 [preferably from 1.2:1 to 1.1:1].
8. A handle according to ^{CLAIM 1} [any preceding claim] wherein the major axis of the second grip portion has a maximum length of from 8 to 14 mm [preferably from 10 to 12 mm].

9. A handle according to ^{CLAIM 1} [any preceding claim] wherein the minor axis of the second grip portion extends between top and bottom surfaces thereof and at least one of the top and bottom surfaces has gripping ridges (7) thereon.
10. A handle according to ^{CLAIM 1} [any preceding claim] further comprising a third grip portion (4) distal the second grip portion (3), the third grip portion being both wider and deeper than the second grip portion.
11. A handle according to Claim 9 wherein the third grip portion is coated with elastomer.
12. A handle according to ^{CLAIM 1} [any preceding claim] which has a primary grooming head (6) integrally or releasably attached to the distal end thereof, and wherein the grooming head has bristles extending therefrom in a direction generally parallel to the major axis of the first grip portion.
13. A personal grooming implement according to Claim 12 wherein the first grip portion is removable.
14. A personal grooming implement according to Claim 13 wherein the primary grooming head is releasably attached and the first grip portion conceals auxiliary grooming heads or a thinner skeleton.
15. A personal grooming implement according to Claim 13 ^{or Claim 14} [or Claim 14] wherein the removable first grip portion is adapted to provide a cap which can fit over the primary grooming head.

A HANDLE FOR A TOOTHBRUSH

Field Of The Invention

The present invention relates to handles for personal care implements, more especially for toothbrushes.

Background Of The Invention

In order to function effectively, toothbrushes and other such hand-held implements require to be gripped firmly. However they often require the grip to be frequently changed, such as by rotating the handle within the user's hand, in order, for example, to reach different parts of the mouth, to adjust to brushing of different tooth surfaces or to employ varying brushing orientations as recommended by dental professionals.

Surprisingly, most toothbrushes still have a rather conventional handle which is typically rectangular, circular, or rounded rectangular in cross-section, with the cross-section being more or less the same shape along the length of the handle. Improvements to the grip are generally confined to the inclusion of elastomeric inserts. Nevertheless, the patent literature documents several attempts to improve upon the basic design.

US 4,780,924 describes an ergonomically designed toothbrush with a shaped handle which is comfortable to grasp in numerous ways with either hand. Although the handle has a distinctive shape in side view, it is described as being substantially rectangular in cross-section throughout its length.

US 5,191,671 describes a toothbrush with a handle having a trapezoidal cross-section which both aids in orientation of the bristles in the mouth and provides strength.

WO 96/01577 describes a toothbrush with a radial anti-slip structure protruding from and circumscribing the bottom and lateral surfaces of the handle. A stated advantage of this arrangement is that it does not force gripping at any predisposed orientation but allows for holding the toothbrush in the user's most habitual manner.

WO 97/07706, in the name of Colgate-Palmolive Company, describes a toothbrush with a handle which has an end portion, a shoulder and a waist, the waist being narrower in plan view than the end portion or the shoulder. The handle preferably also comprises grip-enhancing mats. A stated objective of the handle configurations is the provision of a toothbrush which is easier for the user to manipulate. The Applicant also markets a corresponding brush in Europe under the 'Sensation' name, further described on the applicant's web site as the 'Wave' toothbrush and said to be very comfortable to hold and manoeuvre. Although the patent application discloses different ratios of end portion

and/or shoulder to the waist between plan and side views, there is no disclosure of non-circular sections having different orientations. The marketed brush has a substantially constant shaped cross-section along its length.

WO 99/23910, in the name of Gillette Canada Inc., illustrates a toothbrush corresponding to the Oral-B® Cross-Action™ toothbrush which has a grip portion of the handle having a rounded rectangular section and a narrower waist portion with an approximately square section .

Despite the foregoing, there remains a need for further improvement in the ergonomics of handle design for toothbrushes and the like. It has now been found that a handle which is comfortable to hold, provides a firm grip and facilitates manipulation, particularly rotation, by the user can be provided by arranging for adjacent first and second grip portions which have respectively ovoid and elliptical cross-sections having perpendicular major axes.

Summary Of The Invention

The present invention provides a handle for a personal care implement, especially for a toothbrush, the handle having distal and proximal ends, the distal end being connected to, or adapted to connect to, a grooming head. The handle comprises:

- a) a first grip portion, adjacent the proximal end of the handle, for holding in the user's hand, the first grip portion having an ovoid cross-section which has a major axis and a minor axis; and
- b) a second grip portion, for manipulation by the user's fingers, extending from the first grip portion in the direction of the distal end of the handle, and having, at least in a region adjacent the first grip portion, an elliptical cross-section which has a major axis and a minor axis;

characterised in that the major axis of the second grip portion is perpendicular to the major axis of the first grip portion.

An implement with a handle as described herein is comfortable to hold and easy to adjust within the hand. It is particularly suited for the manipulations required of a toothbrush but it is envisaged that it would also be suitable for similar personal care implements such as razors, hairbrushes, tongue scrapers and the like.

Detailed Description of the Invention

Definitions

The longitudinal axis of the handle is that which extends between the distal and proximal ends thereof. Other references to longitudinal should be taken to refer to directions along or parallel to the longitudinal axis unless specified otherwise.

Unless specified otherwise, handle cross-sections referenced herein should be taken perpendicular to the longitudinal axis of the handle.

Major axes refer to the longest dimensions of the cross-sections to which they refer. Minor axes refer to the longest dimensions of the same cross-sections drawn perpendicular to the major axes. A minor axis will always be shorter than the corresponding major axis.

By "ovoid" is meant a 2-dimensional figure approximately corresponding to the typical lengthwise cross-section of an egg, that is a generally rounded figure having one end which is more pointed than the other. It includes, for example, figures which may have partially flattened portions provided that the overall ovoid impression is retained.

Handle

The handle of the invention has distal and proximal ends. The distal end is connected to, or is adapted to connect to, a grooming head. That is, the grooming head is integrally formed with or can be detachably connected to the handle, for example to permit replacement of a worn head or to allow substitution of a different type of head, such as a gum massager, tongue scraper, tooth pick, compact brush or interdental brush for a regular brush head. The form of the head is not critical to the invention, although a correlation between the shape of the head and the first grip portion of the handle can provide additional benefits as discussed below.

In a preferred embodiment the handle has a head integrally moulded with it, the head bearing bristles or being subsequently fitted with bristles, such that it forms a toothbrush. The head, excluding bristles and massaging elements, can be of single construction or it can be multi-segmented as set out in WO-A-98/27846, incorporated herein by reference. Preferably it is of single construction. In a further particularly preferred embodiment the head comprises both bristles and massaging elements as disclosed in co-pending application 99GB-013717, incorporated herein by reference in its entirety. In the preferred embodiment the distal end of the handle has a primary grooming head integrally or releasably attached thereto, wherein the grooming head has bristles extending therefrom in a direction generally parallel to the major axis of the first grip portion and most preferably in the direction drawn towards the more pointed end of the ovoid cross-section.

The handle herein comprises at least first and second grip portions. The first grip portion, adjacent the proximal end of the handle, is for holding in the palm of the user's hand. It has an ovoid cross-section which has a major axis and a minor axis. The first grip portion has a longitudinal length of from about 50 to about 100 mm, preferably from about 60 to about 90 mm. In order to achieve a smooth transition into the second grip portion of the handle, the cross-section of the first grip portion may not be ovoid along its entire length but typically it will be ovoid along 50% or more, preferably 65% or more of its length. The ovoid cross-section has a major axis and a minor axis which are generally in the ratio of from 1.4:1 to 1.1:1, preferably in the ratio of from 1.3:1 to 1.1:1, and more preferably from 1.2:1 to 1.1:1. Again the precise values of the ratio may vary along the length of the first grip portion but this will generally be true along 50% or more, preferably 65% or more of its length. The first grip portion has a top surface which, in side profile, is preferably arcuate to provide a more comfortable grip. The proximal end of the first grip portion is also preferably rounded for the same reason. A bottom surface of the first grip portion, opposed to the top surface thereof, is preferably flattened along at least part of its length so that the handle can rest in a stable position when placed on a flat surface, for example in order to avoid bristle contact with the surface. The maximum value of the major axis of the first grip portion, at about 40% to 60% along its longitudinal axis, is preferably in the range from about 15 to about 20 mm, more preferably from about 16.5 to about 19 mm. The maximum value of the minor axis of the first grip portion, generally occurring at about the same longitudinal position as that of the major axis, is generally in the range from about 11.5 to about 17 mm, preferably in the range from about 13 to about 17 mm, more preferably from about 14 to about 16 mm.

In an especially preferred embodiment the first grip portion is entirely coated with elastomer, this makes it comfortable to hold and allows greater flexibility in providing a distinctive appearance. The elastomer coating comprises part of the first grip portion and should be included in any dimensional analysis thereof. In order to reduce the friction between the brush and machinery parts during manufacturing, a 'stripe' of plastic can optionally be allowed to protrude through the elastomer at parts where the handle contacts guide channels when the handle is conveyed from one manufacturing station to another. Generally the first grip portion will be an integral part of the handle. It is also envisaged however that at least an outer part of the first grip portion could be removable, preferably with a snap on/off or friction fit, in order to conceal a storage area for a removable head; auxiliary grooming heads which can optionally be permanently attached or releasably attached to the proximal end of the handle; auxiliary materials such as toothpaste, other cleaning materials or diagnostic elements; or merely a thinner skeleton

which more easily fits into a conventional toothbrush holder. Alternatively, or additionally a removable first grip portion, or outer part thereof, can be adapted to provide a cap which can fit over the head which is attached to the distal end of the handle. In this way the whole implement can be adapted to occupy a smaller space when not being used and/or the head can be kept clean, making it particularly suited for travel usage. Suitable auxiliary grooming heads herein include, but are not limited to a gum massager, tongue scraper, tooth pick, compact brush or interdental brush.

The second grip portion of the handle extends from the first grip portion in the direction of the distal end of the handle. It is particularly for manipulation by the user's fingers and has, at least in a region adjacent the first grip portion, an elliptical cross-section having major and minor axes. The second grip portion typically has a longitudinal length of from about 20 to about 45 mm, preferably from about 25 to about 35 mm. Suitably the cross-section of the second grip portion is elliptical along 70% or more, preferably 90% or more of its length. The elliptical cross-section has a major axis and a minor axis which are preferably in the ratio of from 1.3:1 to 1.1:1, preferably from 1.2:1 to 1.1:1. Again the precise values of the ratio may vary along the length of the second grip portion but this will generally be true along 70% or more, preferably 90% or more of its length. The maximum value of the major axis of the second grip portion is preferably in the range from about 8 to about 14 mm, more preferably from about 10 to about 12 mm. The maximum value of the minor axis of the second grip portion is preferably in the range from about 8 to about 10 mm.

The major axis of the second grip portion is perpendicular to the major axis of the first grip portion.

The minor axis of the second grip portion extends between top and bottom surfaces thereof. In preferred embodiments at least one of the top and bottom surfaces, preferably both, has gripping ridges thereon. These are preferably formed from an elastomer and can readily be incorporated using conventional moulding techniques. The ridges, which preferably extend in a transverse direction along the surface(s), do not generally project from the surface(s) by more than about 1 mm and may also extend around the sides of the second grip portion. In measuring or calculating dimensions or ratios of the second grip portion any ridges present should be excluded.

In preferred embodiments herein the handle further comprises a third grip portion distal the second grip portion, the third grip portion being both wider and deeper than the second grip portion. The third grip portion can act as a thumb stop and is preferably

coated with an elastomer. The third grip portion can comprise a means for releasably attaching a head and/or neck to the handle.

The handle may further comprise a neck region at its proximal end, the neck region being generally of smaller cross-section than the rest of the handle and usually devoid of grip elements.

The bulk of the handle (and head where appropriate) is generally made of relatively non-compressible materials, preferably with a modulus of elasticity of at least about 500 MPa, more preferably at least about 1000 MPa, which are conventional in the manufacture of toothbrushes, especially plastics materials. Suitable plastics materials include, for example, polyamides, polypropylenes, polyurethanes, poly(methylmethacrylates), and cellulose acetate propionates. Polypropylene is preferred. Suitable polypropylenes include 'Polypropylene Mosten 52945' (marketed by Schulman), having a modulus of elasticity (ISO 178) of 1500 MPa and Apryl 3400 MA1 from Elf Atochem.

The handle (and head where appropriate) is typically made by injection moulding. Bristles and massaging elements can be attached to the head by art-known methods such as stapling and anchorless manufacturing technologies.

Elastomeric portions of the handle herein are preferably made of a thermoplastic elastomer having a hardness from about 10 to about 90 Shore A, more preferably from about 50 to about 80 Shore A and most preferably about 70 Shore A. Suitable materials include those available under the tradenames Megol, Santoprene and Multibase. Silicone elastomers are also useful. Preferably the handle comprise a unitarily moulded skeleton onto which the elastomer areas are moulded in a separate injection moulding step. Preferably all the elastomer areas are interconnected to allow single injection moulding.

Brief Description Of The Drawings

While the specification concludes with claims particularly pointing out and distinctly claiming the subject invention, it is believed the same will be better understood from the following description taken in conjunction with the accompanying drawings in which:

Figure 1 is a perspective view of an embodiment of a handle of the present invention.

Figure 2 is a top view of Figure 1.

Figure 3 is a bottom view of Figure 1.

Figure 4 is a side view of Figure 1.

Figure 5 is a cross-section through the second grip portion at S-S.

Figure 6 is a cross-section through the first grip portion at F-F.

Figure 7 is a side view of a second embodiment of a handle of the present invention.

Detailed Description Of The Drawings

Referring now to the drawings in detail wherein like numerals indicate the same element throughout the views there is shown in Figures 1 to 6 a handle according to the invention generally indicated as 1. The handle comprises first, second and third grip portions indicated respectively as 2, 3 and 4. The handle further comprises a slim neck 5 and has a head 6 integrally attached to distal end of the handle 1. In the preferred embodiment the head 6 has bristles extending from the upper face of the head 6, these are not shown however. In this embodiment the head, neck and second grip portion are all part of an unitarily formed polypropylene skeleton which extends the entire length of the brush. First and third grip portions, 2 and 4, have an outer coating of elastomer. The second grip portion further comprises gripping ridges 7 which extend transversely across and project from the upper and lower surfaces. A channel 8 running longitudinally along the handle connects the various elastomeric areas so that they can be manufactured by single-point injection moulding.

The first grip portion 2 has an ovoid cross-section, as best seen in Figure 6. A flattened portion 9 on the lower surface of the first grip portion allows the handle to rest in a stable position on a flat surface with bristle-bearing face of head 6 uppermost. Viewed in side profile, as in Figure 4, the first grip portion has an arcuate upper surface along the longitudinal direction. The proximal end 10 of the handle is rounded. As described above, the first grip portion can be detachable from the main body of the handle.

The second grip portion 3 has an elliptical cross-section, as best seen in Figure 5. Its major and minor axes, 11 and 12, are perpendicular to the major and minor axes, 13 and 14, of the first grip portion.

This embodiment comprises a third grip portion 4 which can act as a rest for the user's thumb and has a flat landing area 15 for that purpose.

In Figure 7, a second embodiment of the handle is shown in which portions 16 of the polypropylene part of the brush handle protrude through the elastomer coating of the first and third grip portions both along the sides of the handle and at its proximal end. The exposed polypropylene portions assist in the smooth running of the handle along manufacturing production lines.

Claims

1. An elongated handle (1), for a personal care implement such as a toothbrush, having distal and proximal ends, the distal end being connected to, or adapted to connect to, a grooming head (6); the handle comprising:
 - a) a first grip portion (2), adjacent the proximal end of the handle, for holding in the user's hand, the first grip portion having an ovoid cross-section which has a major axis and a minor axis; and
 - b) a second grip portion (3), for manipulation by the user's fingers, extending from the first grip portion in the direction of the distal end of the handle, and having, at least in a region adjacent the first grip portion, an elliptical cross-section which has a major axis and a minor axis;characterised in that the major axis of the second grip portion is perpendicular to the major axis of the first grip portion.
2. A handle according to Claim 1 wherein the ratio of the maximum length of major axis of the first grip portion to the maximum length of the major axis of the second grip portion is from 1.2:1 to 1.8:1, preferably from 1.3:1 to 1.6:1.
3. A handle according to Claim 1 or Claim 2 wherein the ratio of the major axis of the first grip portion to the minor axis of the first grip portion is from 1.4:1 to 1.1:1.
4. A handle according to Claim 3 wherein the ratio of the major axis of the first grip portion to the minor axis of the first grip portion is from 1.3:1 to 1.1:1, preferably from 1.2:1 to 1.1:1.
5. A handle according to any preceding claim wherein the first grip portion has a longitudinal length of from 50 to 100 mm, preferably from 60 to 90 mm.
6. A handle according to any preceding claim wherein the first grip portion is coated with elastomer.
7. A handle according to any preceding claim wherein the ratio of the major axis of the second grip portion to the minor axis of the second grip portion is from 1.3:1 to 1.1:1, preferably from 1.2:1 to 1.1:1.
8. A handle according to any preceding claim wherein the major axis of the second grip portion has a maximum length of from 8 to 14 mm, preferably from 10 to 12 mm.

9. A handle according to any preceding claim wherein the minor axis of the second grip portion extends between top and bottom surfaces thereof and at least one of the top and bottom surfaces has gripping ridges (7) thereon.
10. A handle according to any preceding claim further comprising a third grip portion (4) distal the second grip portion (3), the third grip portion being both wider and deeper than the second grip portion.
11. A handle according to Claim 9 wherein the third grip portion is coated with elastomer.
12. A handle according to any preceding claim which has a primary grooming head (6) integrally or releasably attached to the distal end thereof, and wherein the grooming head has bristles extending therefrom in a direction generally parallel to the major axis of the first grip portion.
13. A personal grooming implement according to Claim 12 wherein the first grip portion is removable.
14. A personal grooming implement according to Claim 13 wherein the primary grooming head is releasably attached and the first grip portion conceals auxiliary grooming heads or a thinner skeleton.
15. A personal grooming implement according to Claim 13 or Claim 14 wherein the removable first grip portion is adapted to provide a cap which can fit over the primary grooming head.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
15 March 2001 (15.03.2001)


PCT

(10) International Publication Number
WO 01/17392 A1

- (51) International Patent Classification⁷: **A46B 5/02** [FR/US]; 327 Riverside Drive 32, Covington, KY 451011 (US).
- (21) International Application Number: **PCT/US00/15534**
- (22) International Filing Date: **5 June 2000 (05.06.2000)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
PCT/US99/20606
9 September 1999 (09.09.1999) **US**
- (71) Applicant (for all designated States except US): **THE PROCTER & GAMBLE COMPANY** [US/US]; One Procter & Gamble Plaza, Cincinnati, OH 45202 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **VOLPENHEIM, Daniel, William** [US/US]; 4769 White Blossom Boulevard, Mason, OH 45040 (US). **SOLANKI, Sanjay, Amratlal** [GB/GB]; 46 Willson Road, Englefield Green, Surrey TW20 0QB (GB). **DE SWARTE, Gregory**
- (74) Agent: **REED, T., David**; 5299 Spring Grove Avenue, Cincinnati, OH 45217 (US).
- (81) Designated States (national): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: A HANDLE FOR A TOOTHBRUSH

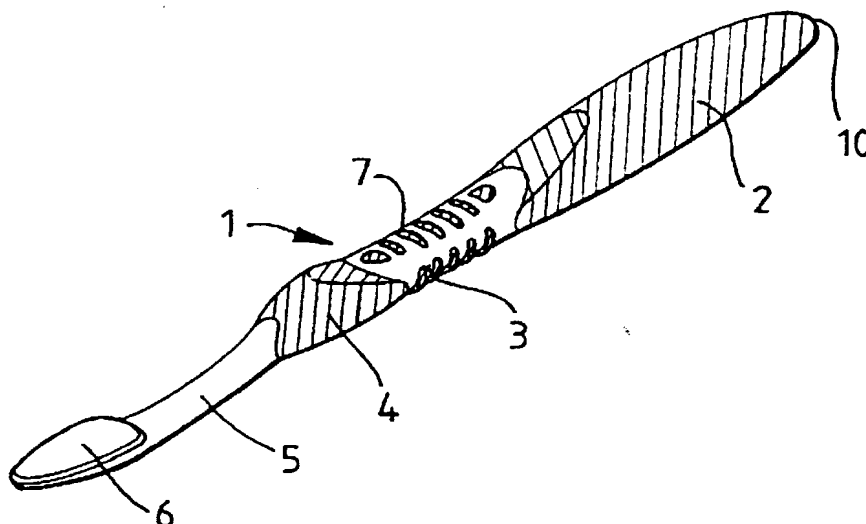

(57) Abstract: The handle of the present invention is for a personal care implement, especially for a toothbrush. The handle has distal and proximal ends, the distal end being connected to, or adapted to connect to, a grooming head. The handle comprises: a) a first grip portion (2), adjacent the proximal end of the handle, for holding in the user's hand, the first grip portion having an ovoid cross-section which has a major axis and a minor axis; b) a second grip portion (3), for manipulation by the user's fingers, extending from the first grip portion in the direction of the distal end of the handle, and having, at least in a region adjacent the first grip portion, an elliptical cross-section which has a major axis and a minor axis. The major axis of the second grip portion is perpendicular to the major axis of the first grip portion. The handle is comfortable to hold, provides a firm grip and facilitates manipulation, particularly rotation, by the user.

1/2

Fig. 1

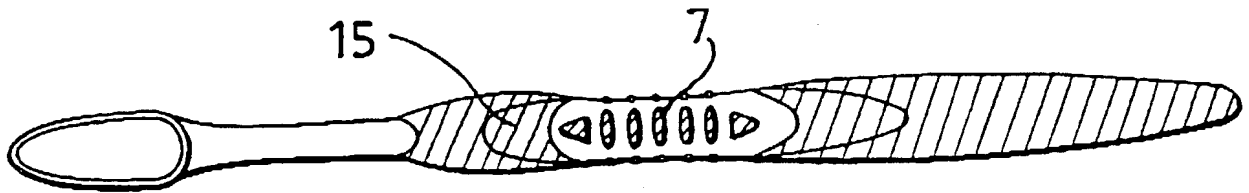
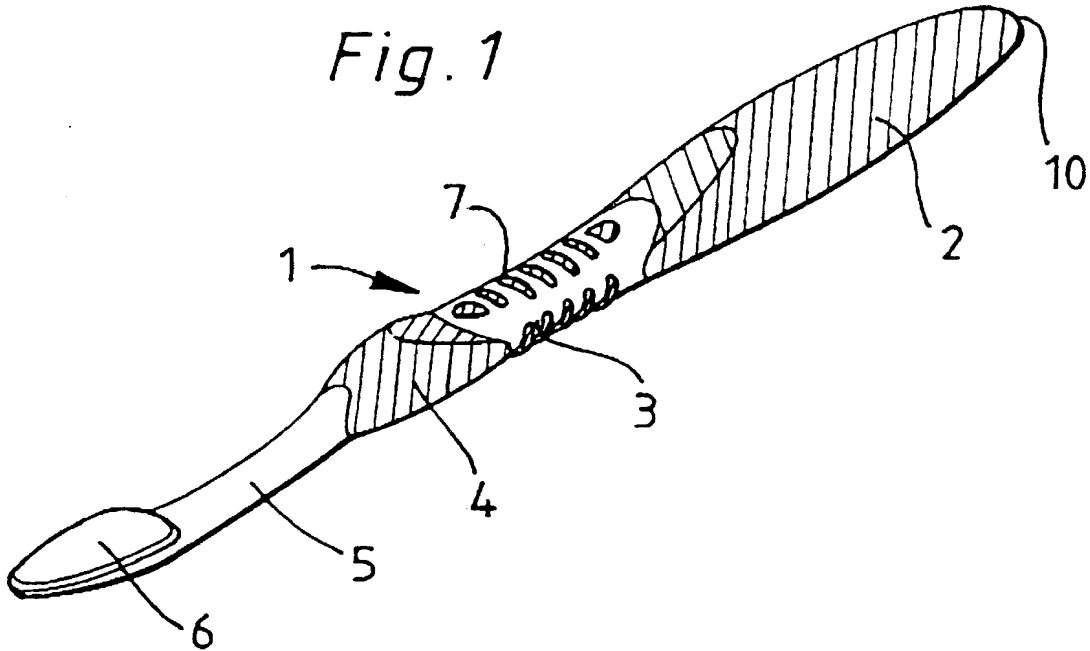


Fig. 2

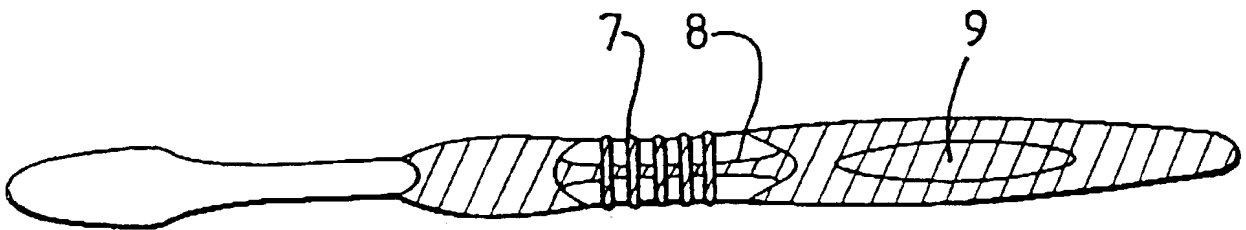


Fig. 3

2/2

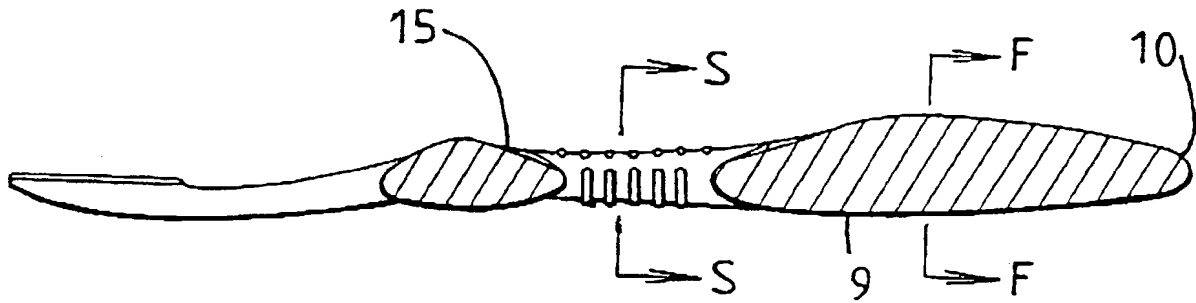


Fig. 4




Fig. 5




Fig. 6

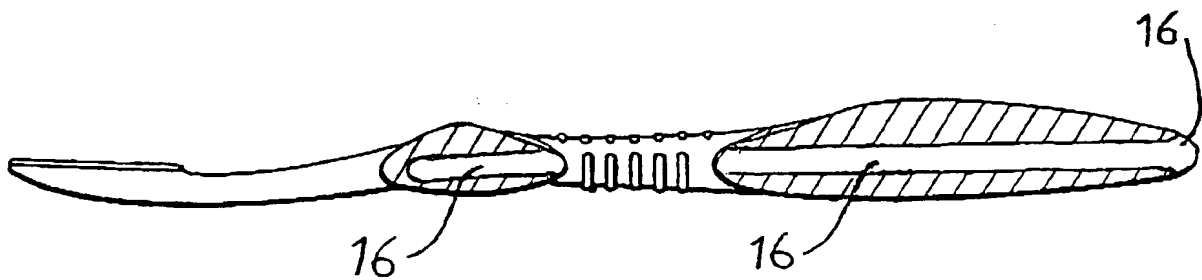


Fig. 7

DECLARATION COMBINED WITH POWER OF ATTORNEY

Page 1 of 2
Attorney Docket No. CM2187M

As a below named inventor, I hereby declare that:

My residence, mailing address and citizenship are as stated below next to my name.

I believe I am the original and first inventor or inventors of the subject matter which is claimed and for which a patent is sought on the invention entitled A Handle for a Toothbrush the specification of which

(check ☐ is attached hereto.
one) ☒ was filed on 05 June 2000 as United States Application No. or
PCT International Application No. PCT/US00/15534
and was amended on _____
(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. §1.56, including for continuation-in-part applications, material information which became available between the filing date of the prior application and the national or PCT international filing date of the continuation-in-part application.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT International application which designated at least one country other than the United States of America, listed below and have also identified below any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			Priority Claimed	
_____	_____	_____	<input type="checkbox"/>	<input type="checkbox"/>
_____	_____	_____	<input type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	Yes	No

I hereby claim the benefit under Title 35, United States Code §119(e) of any United States provisional application(s) listed below.

Application Serial No.	Filing Date	Application Serial No.	Filing Date
------------------------	-------------	------------------------	-------------

I hereby claim the benefit under 35 U.S.C. §120 of any United States application(s), or §365(c) of any PCT International application designating the United States of America, listed below:

U.S. Parent Application Number	PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (If applicable)
	PCT/US99/20606	09 September 1999	

As named inventor, I hereby appoint the registered practitioners associated with customer number 27752 to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

SEND CORRESPONDENCE TO: Customer Number 27752

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

1-00
Full name of sole or first inventor Gregory (NMN) DE SWARTEInventor's signature *Gregory De Swarte*

Date

8/16/02

Residence 5625 Eaglesridge Lane, Cincinnati, Ohio 45230, USA OH.Citizenship FrenchMailing Address 5625 Eaglesridge Lane, Cincinnati, Ohio 45230, USA2-00
Full name of second inventor, if any Sanjay Amratlal SOLANKIInventor's signature *Sanjay Amratlal Solanki*

Date

22nd August 2002Residence 46 Willson Road, Englefield Green, Surrey, TW20 0QB, United Kingdom GDXCitizenship BritishMailing Address 46 Willson Road, Englefield Green, Surrey, TW20 0QB, United Kingdom3-00
Full name of third inventor, if any Daniel William VOLPENHEINInventor's signature *Daniel William Volpenhein*

Date

8/26/02

Residence 4769 White Blossom Blvd, Mason, Ohio 45040, USA OH.Citizenship U.S. CitizenMailing Address 4769 White Blossom Blvd, Mason, Ohio 45040, USA

Full name of fourth inventor, if any _____

Inventor's signature _____

Date

Residence _____

Citizenship _____

Mailing Address _____